

# Pinch Drip™ Pressure Compensating



A PC dripper with a turbulent flow path, sealed to maintain pre-set discharge rates and uniformity. Ergonomically designed for easy finger/thumb installation.

## Features

- Registered design.
- Three colour coded flow rates: 2 lph, 4 lph & 8 lph.
- Turbulent flow path and self-flushing action with insect baffle to minimise blockages.
- Inlet barb has built-in filter.
- Outlet suitable for attaching 4 mm micro tube.
- UV stabilised materials for long life.

## Applications

Pots, patios and landscape applications.

DRIPPERS



Pinch Drip™  
PC 2 lph  
Barb 4 mm


Performance	DISCHARGE (lph)		
	2 lph	4 lph	8 lph
PRESSURE (kPa)			
50	2.0	3.4	5.9
100	2.3	4.1	7.8
150	2.3	4.4	8.1
200	2.3	4.6	8.3
250	2.3	4.6	8.4
300	2.3	4.6	8.4
350	2.2	4.5	8.2
MINIMUM CROSS SECTION (mm)	0.7 x 0.6	0.8 x 0.8	1.2 x 0.9

\* C<sub>v</sub> for all Pinch Drip™ emitters conforms to ISO 9261



Pinch Drip™  
PC 4 lph  
Barb 4 mm

## Discharge Rate: Pinch Drip™ PC

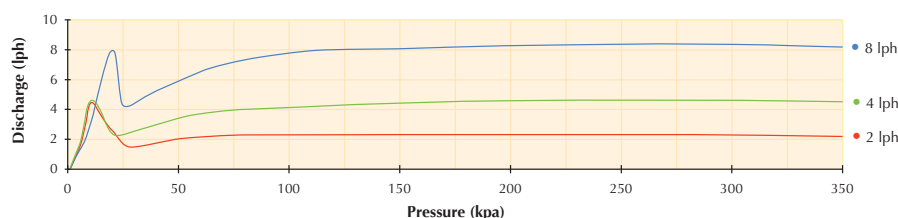

## Pinch Drip™ PC

NOMINAL FLOW	BASE COLOUR	ORDER CODE	PACK QUANTITY	PACKS PER CARTON	CARTON (kg)
2 lph	Red	30705	100	85	10.1
4 lph	Black	30715	100	85	10.1
8 lph	Green	30725	100	85	10.1



Pinch Drip™  
PC 8 lph  
Barb 4 mm

## Specifications

DIMENSIONS ASSEMBLED		UV STABILISED MATERIAL	BASE/CONNECTION TYPE
HEIGHT	25 mm	CAP polypropylene	Inlet: BARB 4 mm
WIDTH	28 mm	BASE polypropylene	Outlet: SPOUT 4 mm
DEPTH	28 mm	DIAPHRAGM silicone rubber	
WEIGHT (approx)	1.1 g		